


R5403x/R5405x Series are high input voltage CMOS-based protection ICs for over-charge/discharge of rechargeable one-cell Lithium-ion (Li-ion) / Lithium polymer excess load current, further include a short circuit protector for preventing large external short circuit current and excess charge/discharge-current. Each of these ICs is composed of four voltage detectors, a reference unit, a delay circuit, a short circuit protector, an oscillator, a counter, and a logic circuit. In addition to SOT-23-5 and SOT-23-6 packages, DFN(PLP)1616-6, DFN(PLP)1820-6 are also available.

FEATURES


- Supply Voltage (V_{DD}) 12V (Absolute Maximum Rating)
- Charger Negative Input Voltage (V_-) ... -30V (Absolute Maximum Rating)
- Operating Input Voltage Range (V_{DD}) 1.5V to 5.0V
- Supply Current (I_{DD}) Typ. 4.0 μ A
- Standby Current (I_s) Max. 0.1 μ A (C, E, G Version)
Max. 2.0 μ A (D, F Version)
- Over-charge (V_{DET1}) Detector Threshold Range 4.0V to 4.5V (0.005V steps)
Detector Threshold Accuracy ... ± 25 mV (25 $^{\circ}$ C)
Output Delay Time ($t_{V_{DET1}}$) Typ. 1.0s
- Over-discharge (V_{DET2}) Detector Threshold Range 2.0V to 3.0V (0.1V steps)
Detector Threshold Accuracy ... $\pm 2.5\%$
Output Delay Time ($t_{V_{DET2}}$) Typ. 20ms
- Excess discharge-current (V_{DET3}) Detector Threshold Range 0.05V to 0.20V (0.005V steps)
Detector Threshold Accuracy ± 15 mV
Output Delay Time ($t_{V_{DET3}}$) Typ. 6ms or 12ms or 18ms
- Excess charge-current (V_{DET4}) Detector Threshold Range -0.05V to -0.20V (0.005V steps)
Detector Threshold Accuracy ± 30 mV
Output Delay Time ($t_{V_{DET4}}$) Typ. 8ms or 16ms
- Short Protection Voltage (V_{SHORT}) Typ. 0.8V
Output Delay Time (t_{SHORT}) Typ. 200 μ s or 300 μ s or 400 μ s
- 0V-battery charge Selectable
- Packages DFN(PLP)1616-6,
DFN(PLP)1820-6,
SOT-23-5, SOT-23-6

BLOCK DIAGRAMS


R5403/05xxxxCC/EC/KG/PG

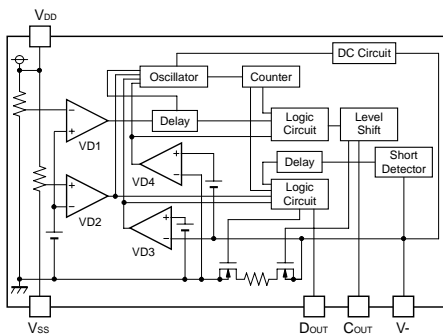

R5403/05xxxxKD/KF

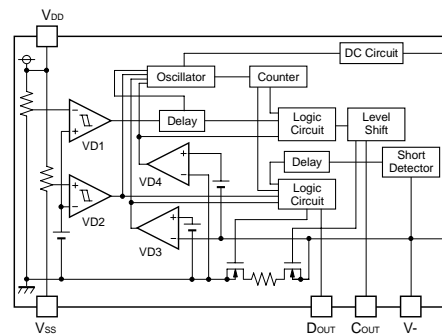

R5403/05xxxxKE

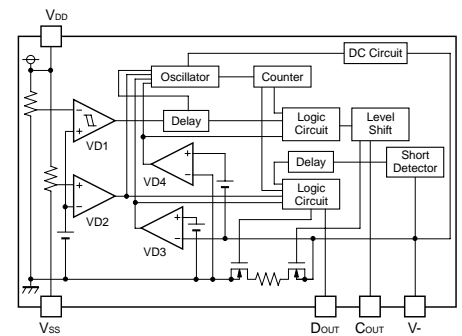

SELECTION GUIDES

Package	Quantity per Reel	Part No.
DFN(PLP)1820-6	5,000 pcs	R5403Kxxx\$*-TR
SOT-23-5	3,000 pcs	R5403Nxxx\$*-TR-FE

Package	Quantity per Reel	Part No.
DFN(PLP)1616-6	5,000 pcs	R5405Kxxx\$*-TR
SOT-23-6	3,000 pcs	R5405Nxxx\$*-TR-FE

xxx: Serial Number for the R5403x/R5405x Series designating input four threshold for over-charge, over-discharge, excess discharge-current, and excess charge-current detectors

\$: Designation of Output delay time option of excess charge-current, excess discharge-current, and Short Circuit

- (C) $t_{V_{DET3}}=12$ ms, $t_{V_{DET4}}=16$ ms, $t_{Short}=300\mu$ s
- (E) $t_{V_{DET3}}=6$ ms, $t_{V_{DET4}}=8$ ms, $t_{Short}=200\mu$ s
- (K) $t_{V_{DET3}}=12$ ms, $t_{V_{DET4}}=8$ ms, $t_{Short}=300\mu$ s
- (P) $t_{V_{DET3}}=18$ ms, $t_{V_{DET4}}=16$ ms, $t_{Short}=400\mu$ s

*: Designation of protection type and 0V-battery charge is available or unavailable

- (C) With Latch function after Over-charge and Over-discharge. 0V-battery charge is available
- (D) Auto Release after Over-charge and Over-discharge. 0V-battery charge is available.
- (E) Auto Release after Over-charge and with latch function after Over-discharge. 0V-battery charge is available.
- (F) Auto Release after Over-charge and Over-discharge. 0V-battery charge is unavailable.
- (G) With Latch function after Over-charge and Over-discharge. 0V-battery charge is unavailable.

PACKAGES (Top View)

DFN(PLP)1616-6	DFN(PLP)1820-6	SOT-23-5	SOT-23-6																																														
<table border="1"> <tr><td>1</td><td>V_{SS}</td></tr> <tr><td>2</td><td>V_{DD}</td></tr> <tr><td>3</td><td>V_-</td></tr> <tr><td>4</td><td>COU</td></tr> <tr><td>5</td><td>NC</td></tr> <tr><td>6</td><td>DOU</td></tr> </table>	1	V_{SS}	2	V_{DD}	3	V_-	4	COU	5	NC	6	DOU	<table border="1"> <tr><td>1</td><td>V_-</td></tr> <tr><td>2</td><td>COU</td></tr> <tr><td>3</td><td>DOU</td></tr> <tr><td>4</td><td>V_{SS}</td></tr> <tr><td>5</td><td>V_{DD}</td></tr> <tr><td>6</td><td>NC</td></tr> </table>	1	V_-	2	COU	3	DOU	4	V_{SS}	5	V_{DD}	6	NC	<table border="1"> <tr><td>1</td><td>V_-</td></tr> <tr><td>2</td><td>V_{DD}</td></tr> <tr><td>3</td><td>V_{SS}</td></tr> <tr><td>4</td><td>DOU</td></tr> <tr><td>5</td><td>COU</td></tr> </table>	1	V_-	2	V_{DD}	3	V_{SS}	4	DOU	5	COU	<table border="1"> <tr><td>1</td><td>DOU</td></tr> <tr><td>2</td><td>V_-</td></tr> <tr><td>3</td><td>COU</td></tr> <tr><td>4</td><td>NC</td></tr> <tr><td>5</td><td>V_{DD}</td></tr> <tr><td>6</td><td>V_{SS}</td></tr> </table>	1	DOU	2	V_-	3	COU	4	NC	5	V_{DD}	6	V_{SS}
1	V_{SS}																																																
2	V_{DD}																																																
3	V_-																																																
4	COU																																																
5	NC																																																
6	DOU																																																
1	V_-																																																
2	COU																																																
3	DOU																																																
4	V_{SS}																																																
5	V_{DD}																																																
6	NC																																																
1	V_-																																																
2	V_{DD}																																																
3	V_{SS}																																																
4	DOU																																																
5	COU																																																
1	DOU																																																
2	V_-																																																
3	COU																																																
4	NC																																																
5	V_{DD}																																																
6	V_{SS}																																																

*) The tab is substrate level (V_{DD})

APPLICATIONS

- Li-ion / Li polymer protector of over-charge, over-discharge, excess discharge-current, excess charge-current for battery pack
- High precision protectors for cell-phones and any other gadgets using on board Li-ion / Li polymer battery