

---

## LOW NOISE 150mA LDO REGULATOR

---

NO.EA-058-111026

### OUTLINE

The R1121N Series are CMOS-based voltage regulator ICs with high output voltage accuracy, extremely low supply current, low ON-resistance, and high Ripple Rejection. Each of these voltage regulator ICs consists of a voltage reference unit, an error amplifier, resistors, a current limit circuit, and a chip enable circuit.

These ICs perform with low dropout voltage and a chip enable function. The line transient response and load transient response of the R1121N Series are excellent, thus these ICs are very suitable for the power supply for hand-held communication equipment.

The output voltage of these ICs is fixed with high accuracy.

Since the package for these ICs is SOT-23-5 (Mini-mold) package, high density mounting of the ICs on boards is possible.


### FEATURES

- Supply Current ..... Typ. 35 $\mu$ A
- Standby Mode ..... Typ. 0.1 $\mu$ A
- Dropout Voltage ..... Typ. 0.2V ( $I_{OUT}=100mA$ )
- Ripple Rejection ..... Typ. 70dB( $f=1kHz$ )
- Temperature-Drift Coefficient of Output Voltage ..... Typ.  $\pm 100ppm/^{\circ}C$
- Line Regulation ..... Typ. 0.05%/V
- Output Voltage Accuracy .....  $\pm 2.0\%$
- Output Voltage Range ..... 1.5V to 5.0V (0.1V steps)  
(For other voltages, please refer to MARK INFORMATION.)
- Package ..... SOT-23-5 (Mini-mold)
- Built-in chip enable circuit (2 types; A: active "L", B: active "H")
- Pin-out ..... Similar to the TK112,TK111

### APPLICATIONS

- Power source for cellular phones such as GSM, CDMA and various kinds of PCSs.
- Power source for domestic appliances such as cameras, VCRs and camcorders.
- Power source for battery-powered equipment.

## BLOCK DIAGRAM

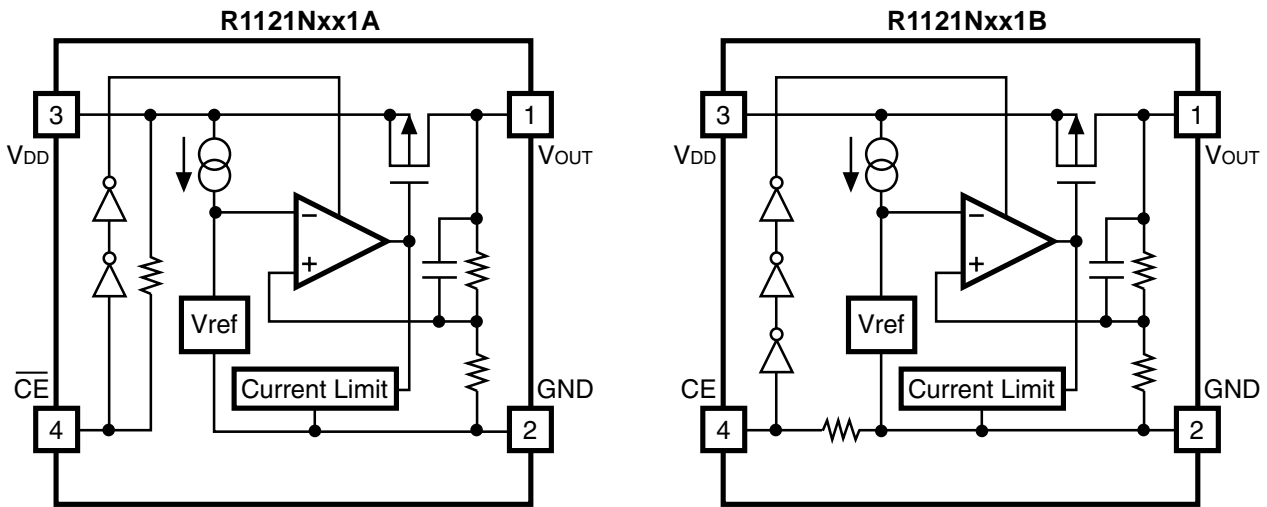

## SELECTION GUIDE

The output voltage, the active type for the ICs can be selected at the user's request.


| Product Name     | Package  | Quantity per Reel | Pb Free | Halogen Free |
|------------------|----------|-------------------|---------|--------------|
| R1121Nxx1*-TR-FE | SOT-23-5 | 3,000 pcs         | Yes     | Yes          |

xx: The output voltage can be designated in the range from 1.5V(15) to 5.0V(50) in 0.1V steps.  
(For other voltages, please refer to MARK INFORMATIONS.)

\* : Designation of Active Type.  
(A) "L" active  
(B) "H" active

## PIN CONFIGURATION

### SOT-23-5



## PIN DESCRIPTION

| Pin No | Symbol                | Description     |
|--------|-----------------------|-----------------|
| 1      | $V_{OUT}$             | Output pin      |
| 2      | GND                   | Ground Pin      |
| 3      | $V_{DD}$              | Input Pin       |
| 4      | $\overline{CE}$ or CE | Chip Enable Pin |
| 5      | NC                    | No Connection   |

## ABSOLUTE MAXIMUM RATINGS

| Symbol    | Item                                      | Rating              | Unit |
|-----------|---|---------------------|------|
| $V_{IN}$  | Input Voltage                             | 9.0                 | V    |
| $V_{CE}$  | Input Voltage( $\overline{CE}$ or CE Pin) | -0.3 ~ $V_{IN}+0.3$ | V    |
| $V_{OUT}$ | Output Voltage                            | -0.3 ~ $V_{IN}+0.3$ | V    |
| $I_{OUT}$ | Output Current                            | 200                 | mA   |
| $P_D$     | Power Dissipation (SOT-23-5)*             | 420                 | mW   |
| $T_{opt}$ | Operating Temperature Range               | -40 ~ 85            | °C   |
| $T_{stg}$ | Storage Temperature Range                 | -55 ~ 125           | °C   |

\*) For Power Dissipation, please refer to PACKAGE INFORMATION.

### ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

## ELECTRICAL CHARACTERISTICS

## • R1121Nxx1A

T<sub>opt</sub>=25°C

| Symbol                               | Item                                   | Conditions   | Min.                      | Typ. | Max.                      | Unit   |
|--------------------------------------|--|--|---------------------------|------|---------------------------|--------|
| V <sub>OUT</sub>                     | Output Voltage                         | V <sub>IN</sub> = Set V <sub>OUT</sub> + 1V<br>1mA ≤ I <sub>OUT</sub> ≤ 30mA   | V <sub>OUT</sub><br>×0.98 |      | V <sub>OUT</sub><br>×1.02 | V      |
| I <sub>OUT</sub>                     | Output Current                         | Refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE                      |                           |      |                           |        |
| ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Load Regulation                        | V <sub>IN</sub> = Set V <sub>OUT</sub> + 1V<br>1mA ≤ I <sub>OUT</sub> ≤ 80mA   |                           | 12   | 40                        | mV     |
| V <sub>DIF</sub>                     | Dropout Voltage                        | Refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE                      |                           |      |                           |        |
| I <sub>SS</sub>                      | Supply Current                         | V <sub>IN</sub> = Set V <sub>OUT</sub> + 1V                                    |                           | 35   | 70                        | μA     |
| I <sub>standby</sub>                 | Supply Current (Standby)               | V <sub>IN</sub> = V <sub>CE</sub> = Set V <sub>OUT</sub> + 1V                  |                           | 0.1  | 1.0                       | μA     |
| ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | Line Regulation                        | Set V <sub>OUT</sub> +0.5V ≤ V <sub>IN</sub> ≤ 8.0V<br>I <sub>OUT</sub> = 30mA |                           | 0.05 | 0.20                      | %/V    |
| RR                                   | Ripple Rejection                       | f = 1kHz, Ripple 0.5Vp-p<br>V <sub>IN</sub> = Set V <sub>OUT</sub> + 1V        |                           | 70   |                           | dB     |
| V <sub>IN</sub>                      | Input Voltage                          |  | 2.0                       |      | 8.0                       | V      |
| ΔV <sub>OUT</sub> /ΔT <sub>opt</sub> | Output Voltage Temperature Coefficient | I <sub>OUT</sub> = 30mA<br>-40°C ≤ T <sub>opt</sub> ≤ 85°C                     |                           | ±100 |                           | ppm/°C |
| I <sub>SC</sub>                      | Short Current Limit                    | V <sub>OUT</sub> = 0V  |                           | 50   |                           | mA     |
| R <sub>PU</sub>                      | $\overline{CE}$ Pull-up Resistance     |  | 2.5                       | 5.0  | 10.0                      | MΩ     |
| V <sub>CEH</sub>                     | $\overline{CE}$ Input Voltage "H"      |  | 1.5                       |      | V <sub>IN</sub>           | V      |
| V <sub>CEL</sub>                     | $\overline{CE}$ Input Voltage "L"      |  | 0.00                      |      | 0.25                      | V      |
| e <sub>n</sub>                       | Output Noise                           | BW=10Hz to 100kHz  |                           | 30   |                           | μVrms  |

## RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

## ● R1121Nxx1B

T<sub>opt</sub>=25°C

| Symbol                               | Item                                   | Conditions  | Min.                      | Typ. | Max.                      | Unit   |
|--------------------------------------|--|---|---------------------------|------|---------------------------|--------|
| V <sub>OUT</sub>                     | Output Voltage                         | V <sub>IN</sub> = Set V <sub>OUT</sub> + 1V<br>1mA ≤ I <sub>OUT</sub> ≤ 30mA    | V <sub>OUT</sub><br>×0.98 |      | V <sub>OUT</sub><br>×1.02 | V      |
| I <sub>OUT</sub>                     | Output Current                         | Refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE                       |                           |      |                           |        |
| ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Load Regulation                        | V <sub>IN</sub> = Set V <sub>OUT</sub> + 1V<br>1mA ≤ I <sub>OUT</sub> ≤ 80mA    |                           | 12   | 40                        | mV     |
| V <sub>DIF</sub>                     | Dropout Voltage                        | Refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE                       |                           |      |                           |        |
| I <sub>SS</sub>                      | Supply Current                         | V <sub>IN</sub> = Set V <sub>OUT</sub> + 1V                                     |                           | 35   | 70                        | μA     |
| I <sub>standby</sub>                 | Supply Current (Standby)               | V <sub>IN</sub> = Set V <sub>OUT</sub> + 1V<br>V <sub>CE</sub> = GND            |                           | 0.1  | 1.0                       | μA     |
| ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | Line Regulation                        | Set V <sub>OUT</sub> + 0.5V ≤ V <sub>IN</sub> ≤ 8.0V<br>I <sub>OUT</sub> = 30mA |                           | 0.05 | 0.20                      | %/V    |
| RR                                   | Ripple Rejection                       | f = 1kHz, Ripple 0.5Vp-p<br>V <sub>IN</sub> = Set V <sub>OUT</sub> + 1V         |                           | 70   |                           | dB     |
| V <sub>IN</sub>                      | Input Voltage                          |   | 2.0                       |      | 8.0                       | V      |
| ΔV <sub>OUT</sub> /ΔT <sub>opt</sub> | Output Voltage Temperature Coefficient | I <sub>OUT</sub> = 30mA<br>-40°C ≤ T <sub>opt</sub> ≤ 85°C                      |                           | ±100 |                           | ppm/°C |
| I <sub>SC</sub>                      | Short Current Limit                    | V <sub>OUT</sub> = 0V   |                           | 50   |                           | mA     |
| R <sub>PD</sub>                      | CE Pull-down Resistance                |   | 2.5                       | 5.0  | 10.0                      | MΩ     |
| V <sub>CEH</sub>                     | CE Input Voltage "H"                   |   | 1.5                       |      | V <sub>IN</sub>           | V      |
| V <sub>CEL</sub>                     | CE Input Voltage "L"                   |   | 0.00                      |      | 0.25                      | V      |
| en                                   | Output Noise                           | BW=10Hz to 100kHz   |                           | 30   |                           | μVrms  |

**RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)**

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

**ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE**

T<sub>opt</sub> = 25°C


| Output Voltage<br>V <sub>OUT</sub> (V) | Output Current                            |      |
|--|---|------|
|  | I <sub>OUT</sub> (mA)                     |      |
|  | Condition                                 | Min. |
| 1.5 ≤ V <sub>OUT</sub> ≤ 1.7           | V <sub>IN</sub> - V <sub>OUT</sub> = 1.0V | 100  |
| 1.8 ≤ V <sub>OUT</sub> ≤ 5.0           |   | 150  |

T<sub>opt</sub> = 25°C

| Output Voltage<br>V <sub>OUT</sub> (V) | Dropout Voltage          |      |      |      |
|--|--------------------------|------|------|------|
|  | V <sub>DIF</sub> (V)     |      |      |      |
|  | Condition                | Min. | Typ. | Max. |
| 1.5                                    | I <sub>OUT</sub> = 100mA | 0.50 |      |      |
| 1.6                                    |                          | 0.40 |      |      |
| 1.7                                    |                          | 0.30 |      |      |
| 1.8 ≤ V <sub>OUT</sub> ≤ 1.9           |                          |      | 0.60 | 1.40 |
| 2.0 ≤ V <sub>OUT</sub> ≤ 2.4           |                          |      | 0.35 | 0.70 |
| 2.5 ≤ V <sub>OUT</sub> ≤ 2.7           |                          |      | 0.24 | 0.35 |
| 2.8 ≤ V <sub>OUT</sub> ≤ 3.3           |                          |      | 0.20 | 0.30 |
| 3.4 ≤ V <sub>OUT</sub> ≤ 5.0           |                          |      | 0.17 | 0.26 |

Note : When set Output Voltage is equal or less than 2.0V,  
V<sub>IN</sub> should be equal or more than 2.0V.

**OPERATION**

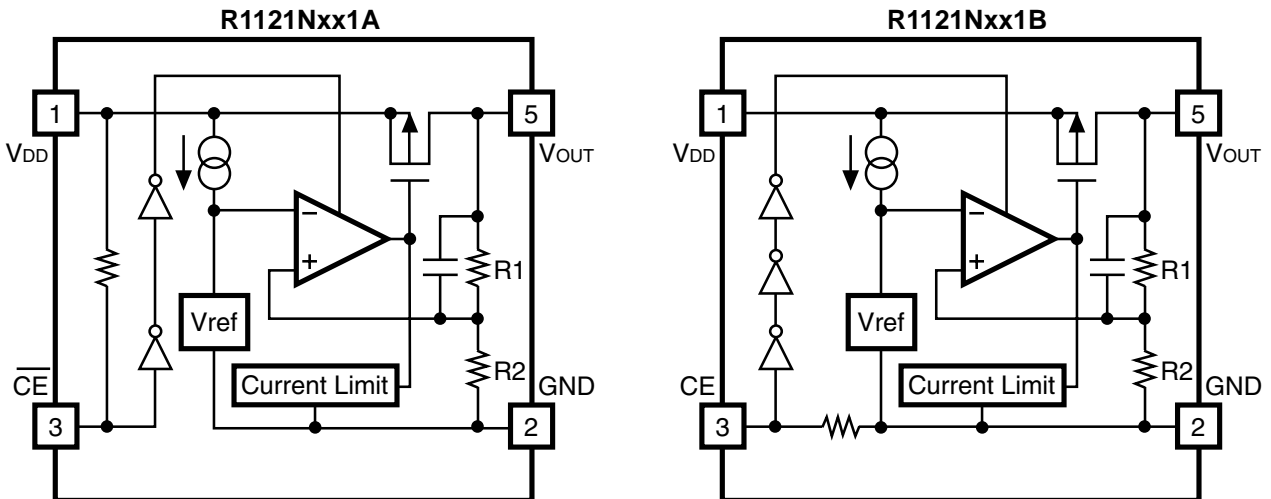

In these ICs, fluctuation of output voltage, V<sub>OUT</sub> is detected by feed-back registers R<sub>1</sub>, R<sub>2</sub>, and the result is compared with a reference voltage by the error amplifier, so that a constant voltage is output.  
A current limit circuit for protection in short mode and a chip enable circuit, are included.

TEST CIRCUITS

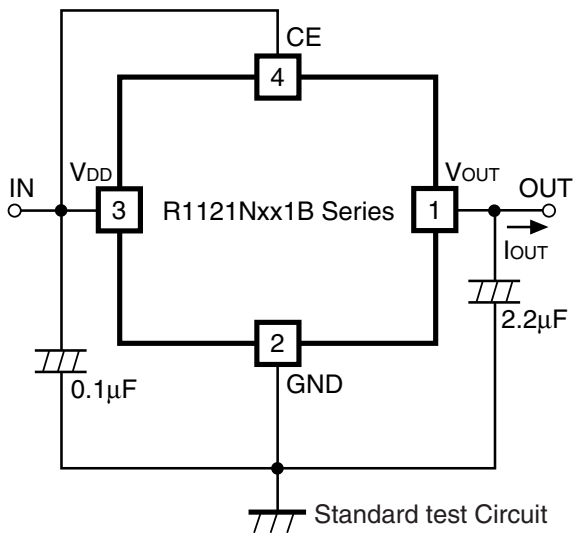


Fig.1 Standard test Circuit

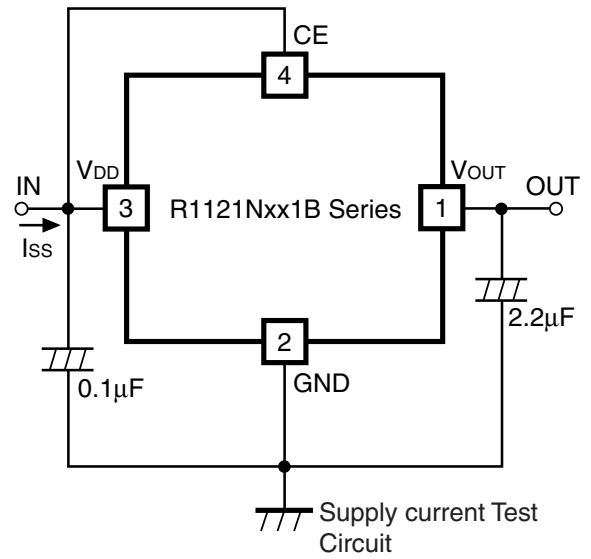


Fig.2 Supply Current Test Circuit

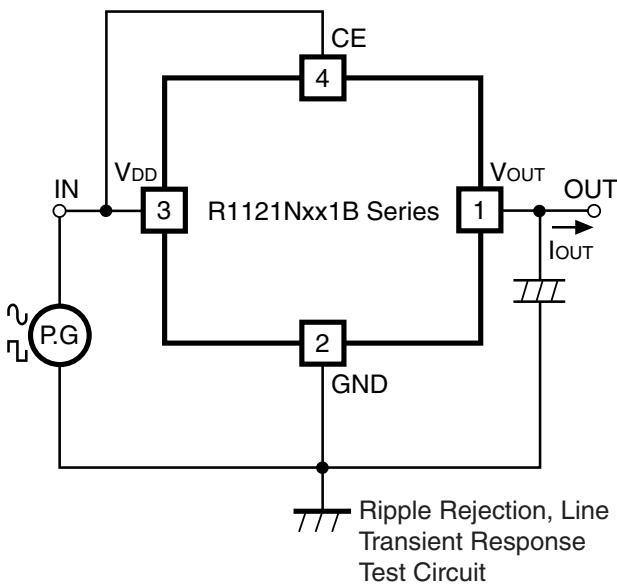


Fig.3 Ripple Rejection, Line Transient Response Test Circuit





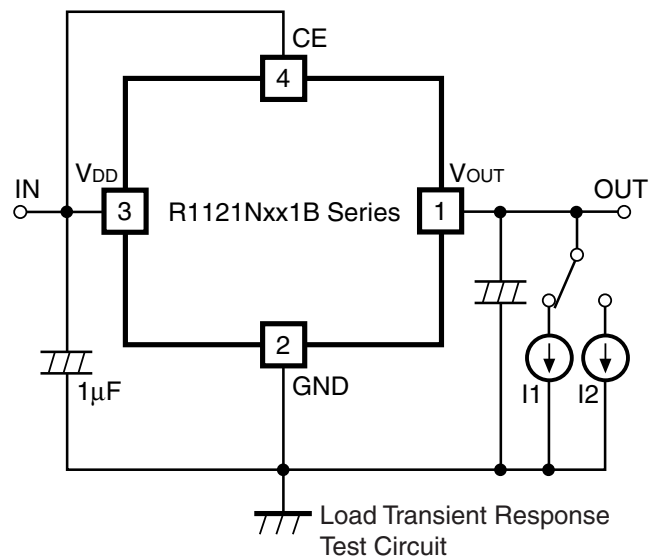




Fig.4 Load Transient Response Test Circuit

## TYPICAL CHARACTERISTICS


### 1) Output Voltage vs. Output Current

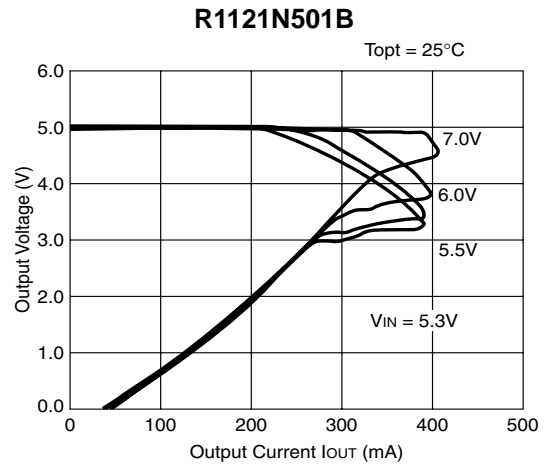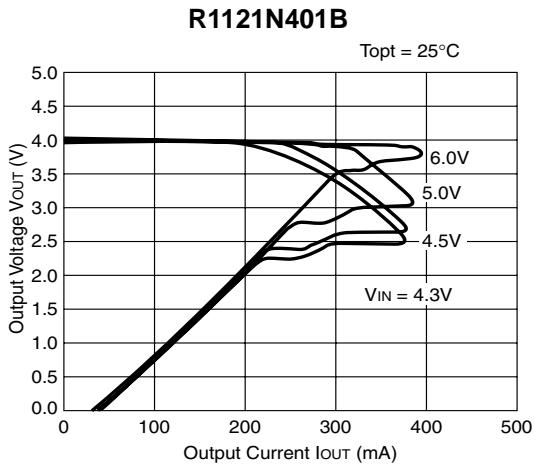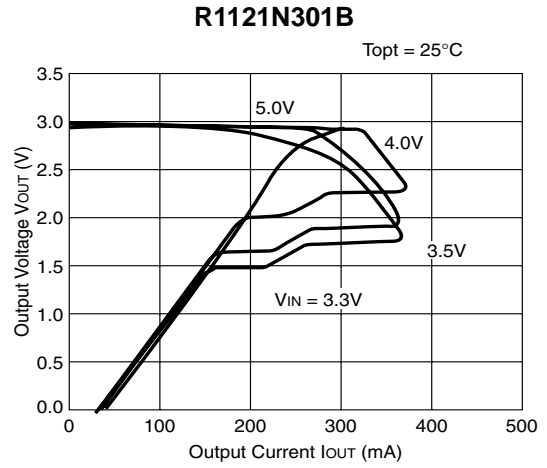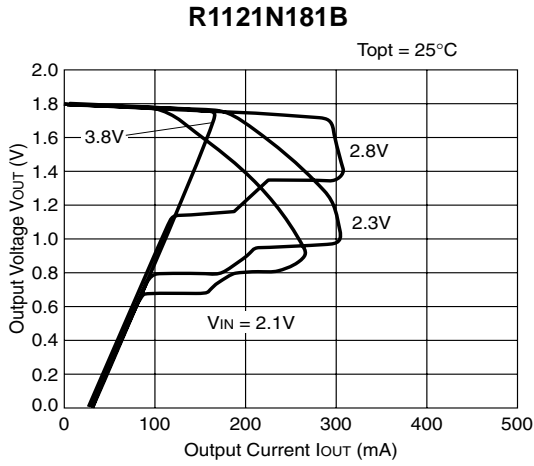


### 2) Output Voltage vs. Input Voltage

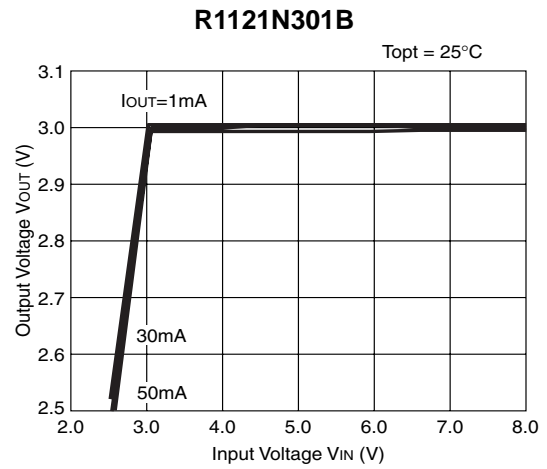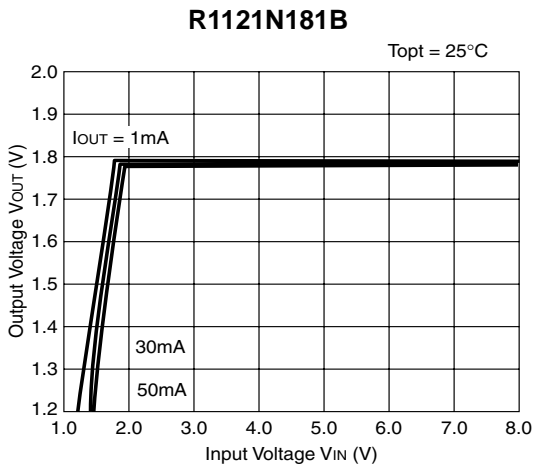

**R1121N401B**

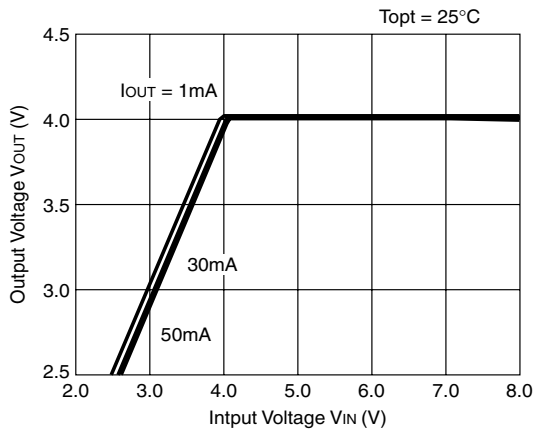


**R1121N501B**

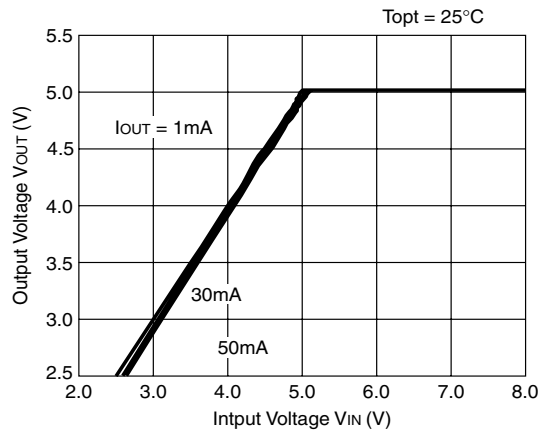


**3) Dropout Voltage vs. Output Current**


**R1121N181B**

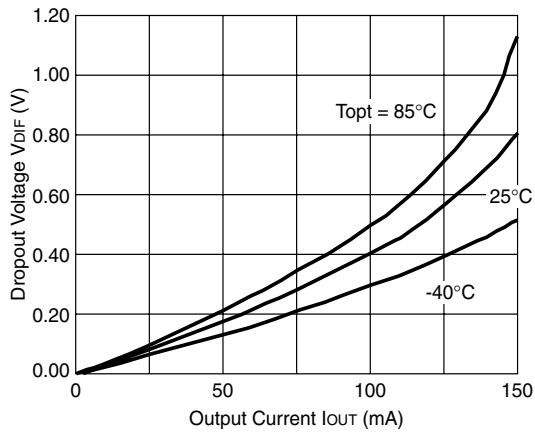


**R1121N301B**

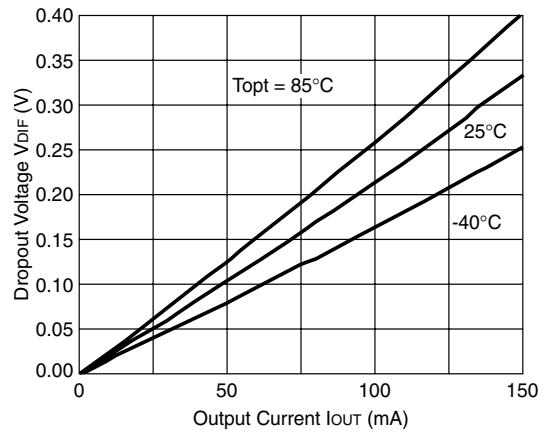

**R1121N401B**

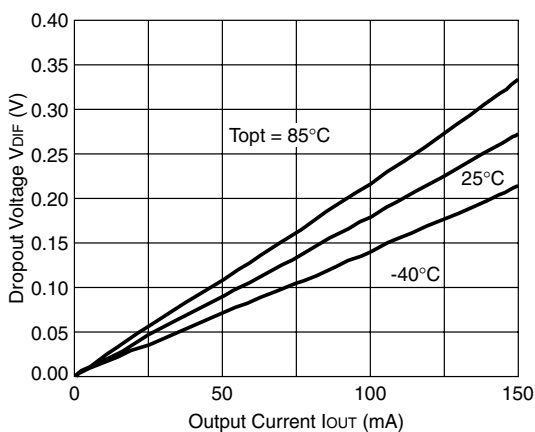


**R1121N501B**

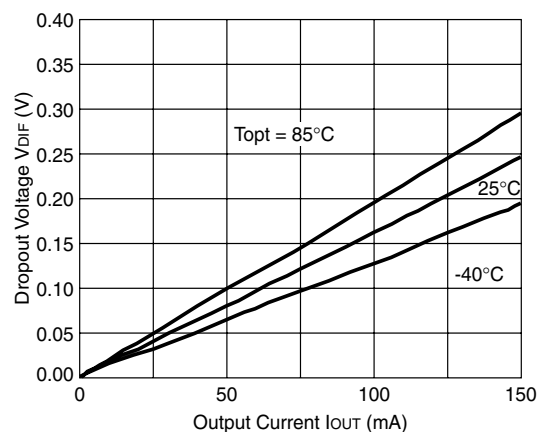


4) Output Voltage vs. Temperature


R1121N181B

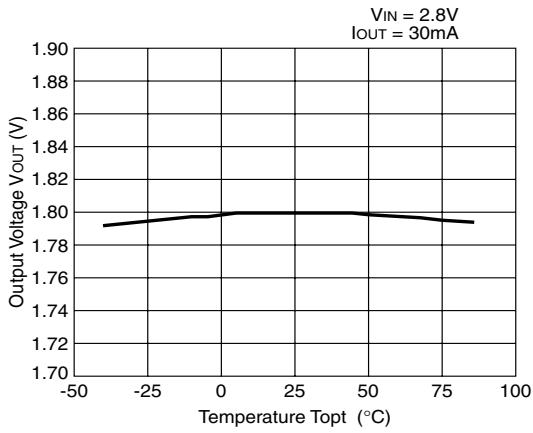


R1121N301B

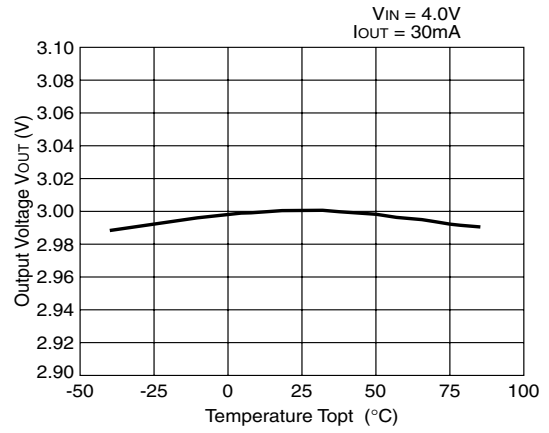

R1121N401B

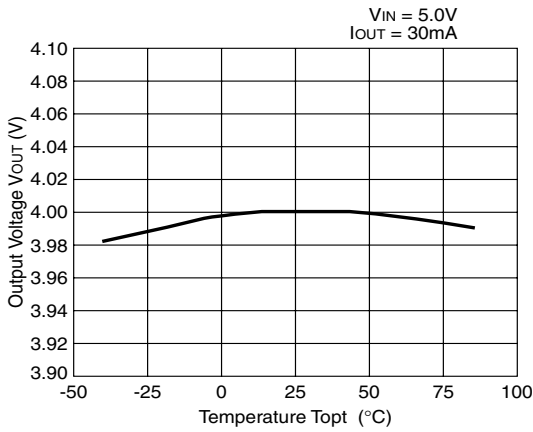


R1121N501B

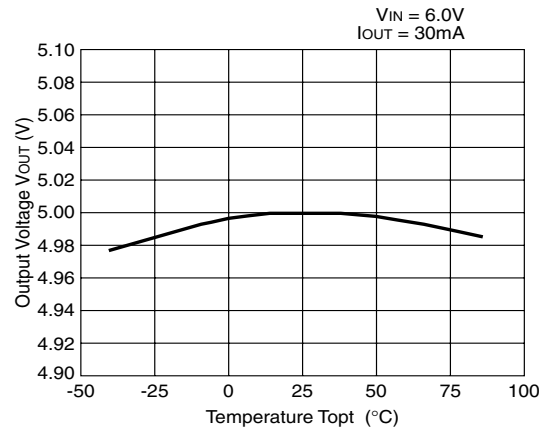


5) Supply Current vs. Input Voltage


R1121N181B

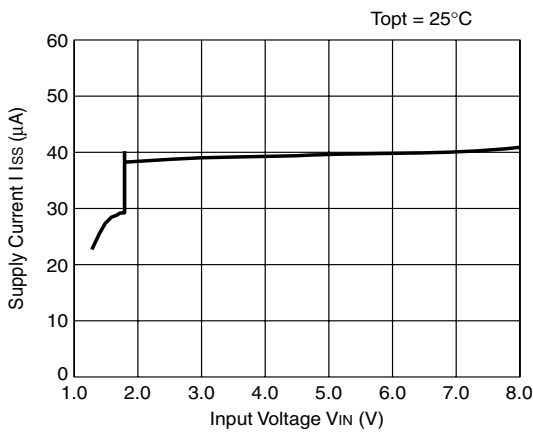


R1121N301B

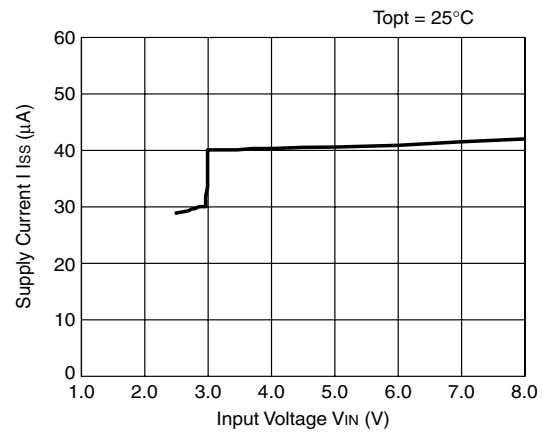

**R1121N401B**

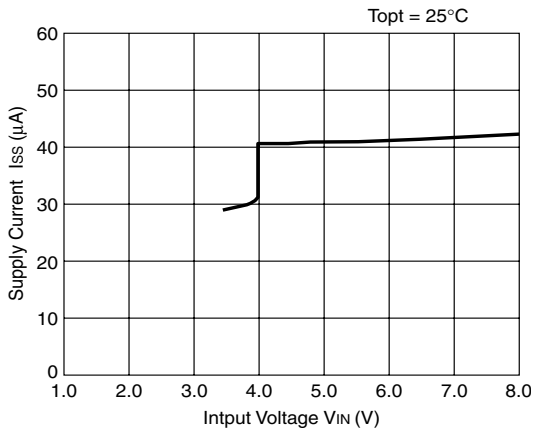


**R1121N501B**

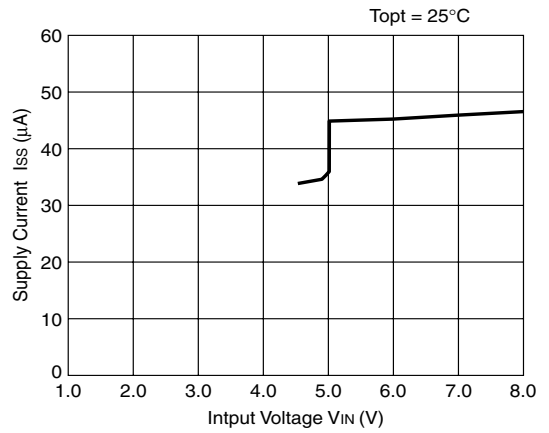


**6) Supply Current vs. Temperature**


**R1121N181B**

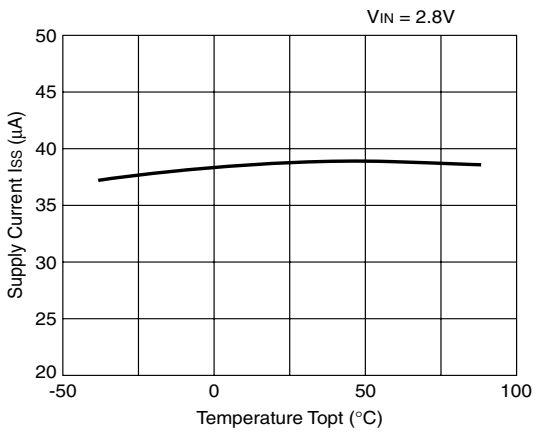


**R1121N301B**

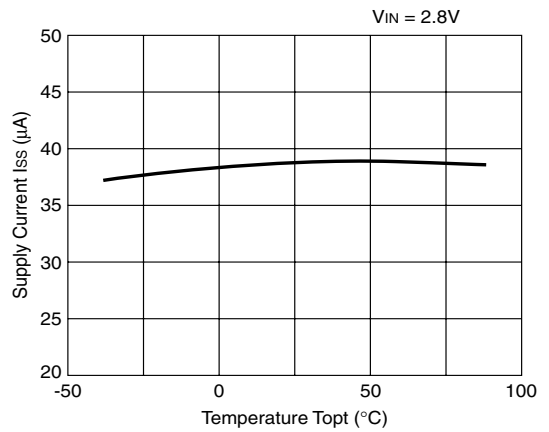

**R1121N401B**

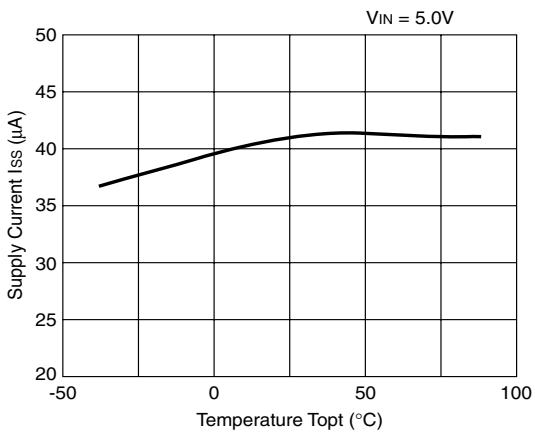


**R1121N501B**

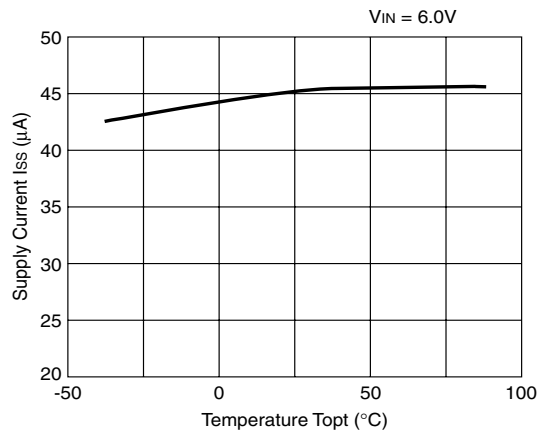

7) Dropout Voltage vs. Set Output Voltage

R1121Nxx1B


Topt = 25 °C

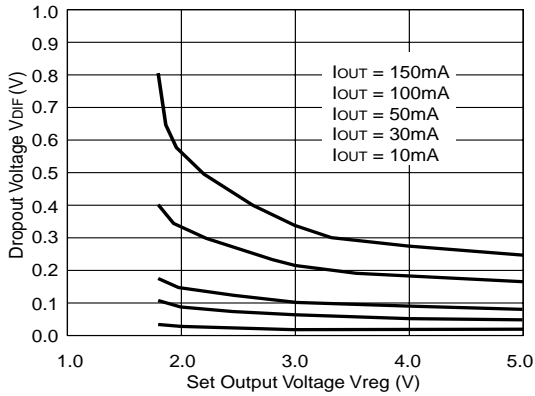

8) Ripple Rejection vs. Frequency


R1121N181B

VIN = 2.8VDC + 0.5Vp-p  
COUT = tantal 1.0μF

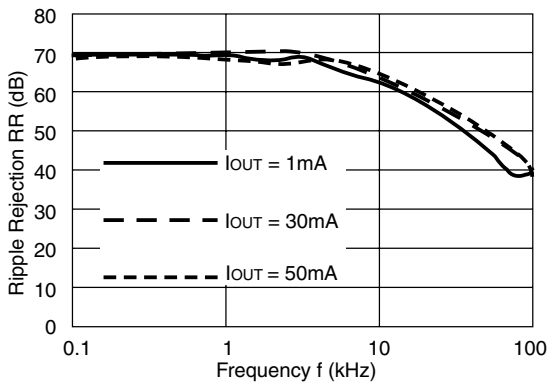


R1121N181B

VIN = 2.8VDC + 0.5Vp-p  
COUT = tantal 2.2μF

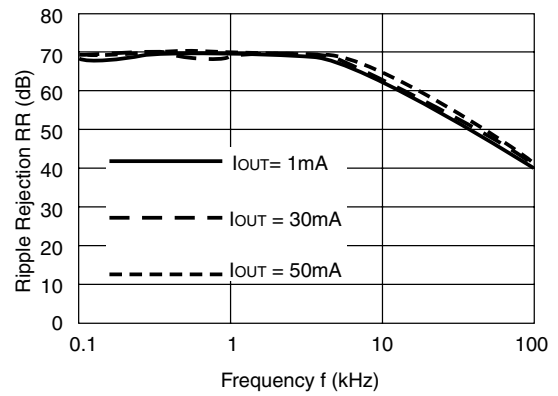


R1121N301B

VIN = 4.0VDC + 0.5Vp-p  
COUT = tantal 1.0μF

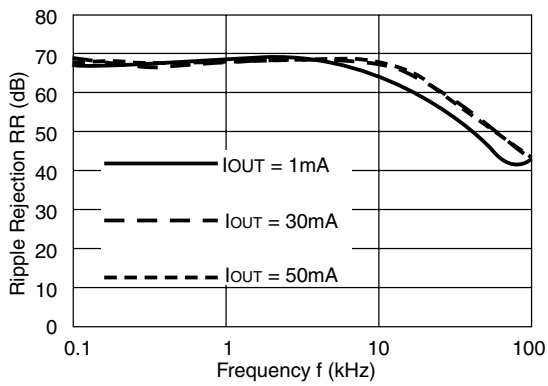


R1121N301B

VIN = 4.0VDC + 0.5Vp-p  
COUT = tantal 2.2μF

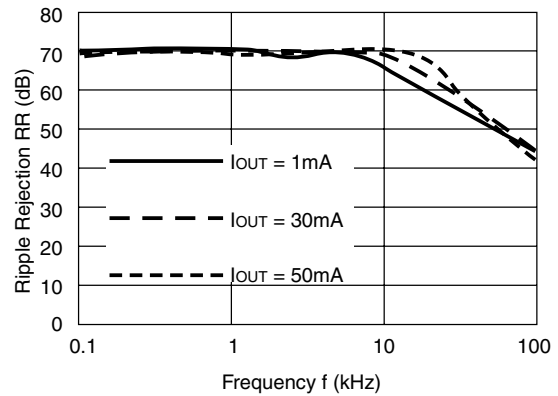


**R1121N401B**

$V_{IN} = 5.0V_{DC} + 0.5V_{p-p}$   
 $C_{OUT} = \text{tantal } 1.0\mu F$

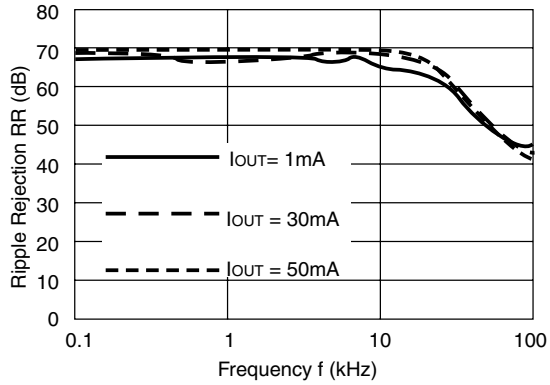

**R1121N401B**


$V_{IN} = 5.0V_{DC} + 0.5V_{p-p}$   
 $C_{OUT} = \text{tantal } 2.2\mu F$

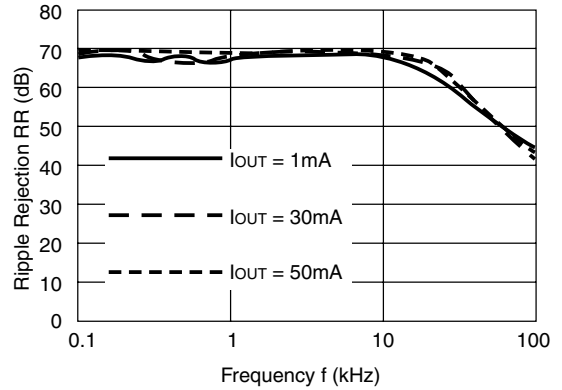

**9) Ripple Rejection vs. Input Voltage (DC bias)**


**R1121N301B**

$I_{OUT} = 1mA$   
 $C_{OUT} = 2.2\mu F$

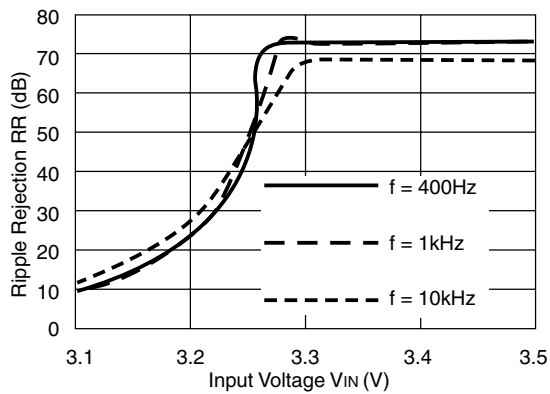


**R1121N301B**

$I_{OUT} = 10mA$   
 $C_{OUT} = 2.2\mu F$

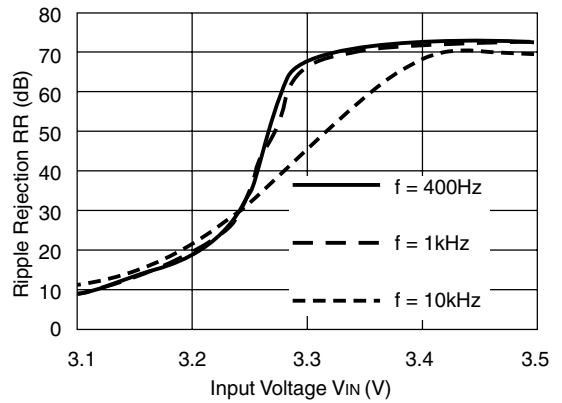

**R1121N301B**


$I_{OUT} = 50mA$   
 $C_{OUT} = 2.2\mu F$

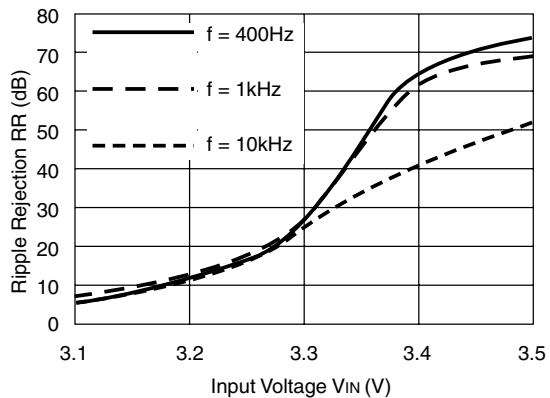

10) LineTransient Response


R1121N301B

$I_{OUT}=30\text{mA}$   
 $t_r=t_f=5\ \mu\text{s}$   
 $C_{OUT}=\text{Tantalum } 1.0\ \mu\text{F}$

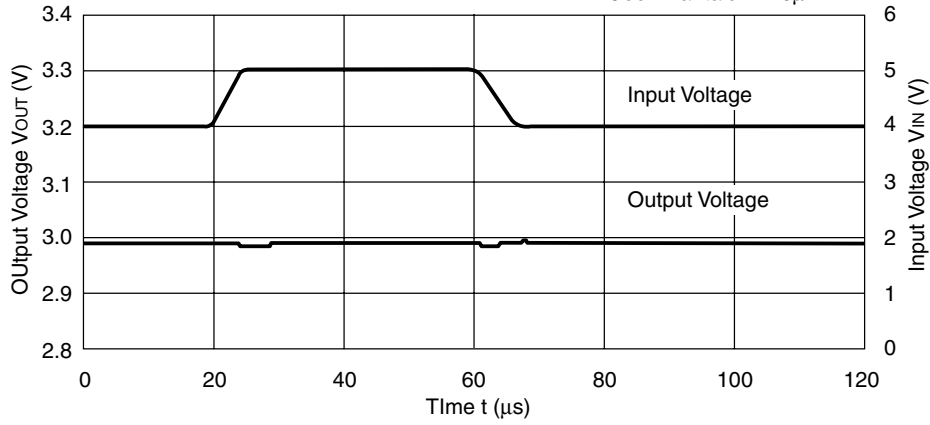


R1121N301B

$I_{OUT}=30\text{mA}$   
 $t_r=t_f=5\ \mu\text{s}$   
 $C_{OUT}=\text{Tantalum } 2.2\ \mu\text{F}$

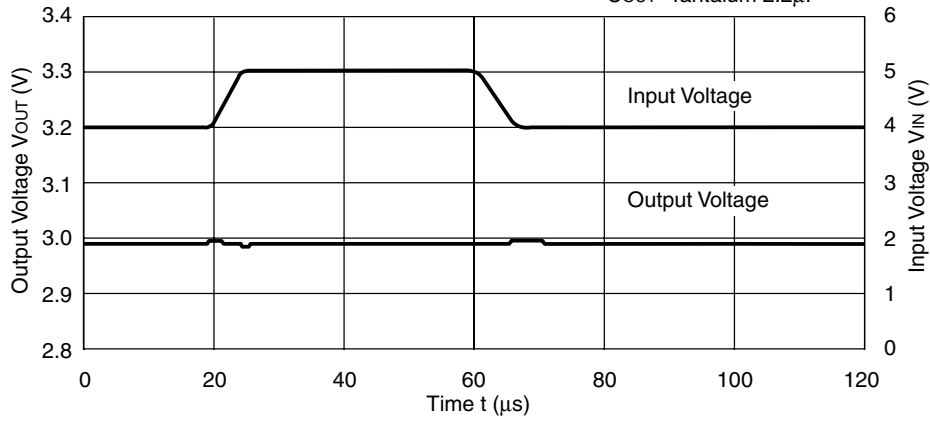

R1121N301B


$I_{OUT}=30\text{mA}$   
 $t_r=t_f=5\ \mu\text{s}$   
 $C_{OUT}=\text{Tantalum } 6.8\ \mu\text{F}$

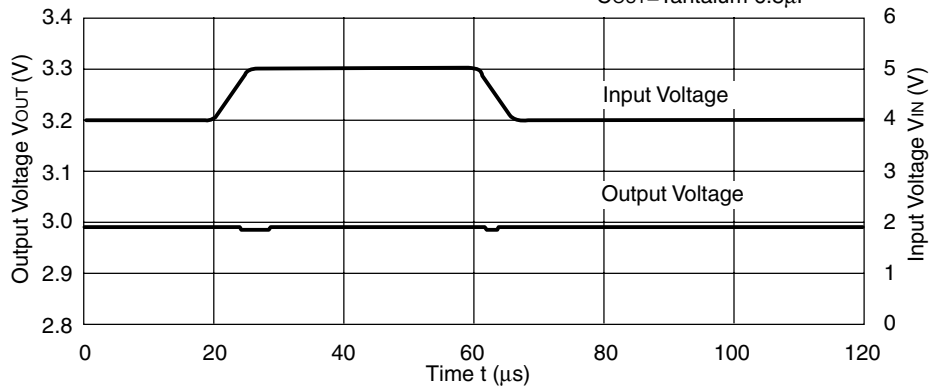

## 11) Load Transient Response


## R1121N301B

$V_{IN}=4V$   
 $C_{IN}=\text{Tantalum } 1\mu F$   
 $C_{OUT}=\text{Tantalum } 1.0\mu F$

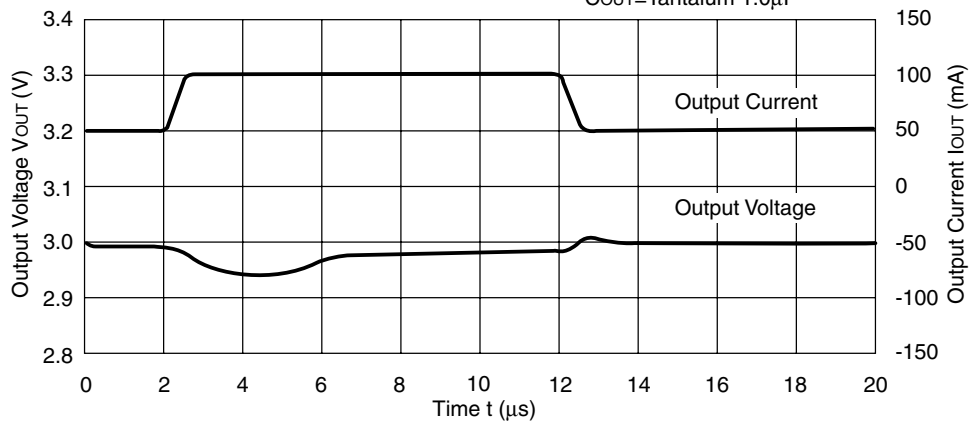


## R1121N301B

$V_{IN}=4V$   
 $C_{IN}=\text{Tantalum } 1\mu F$   
 $C_{OUT}=\text{Tantalum } 2.2\mu F$

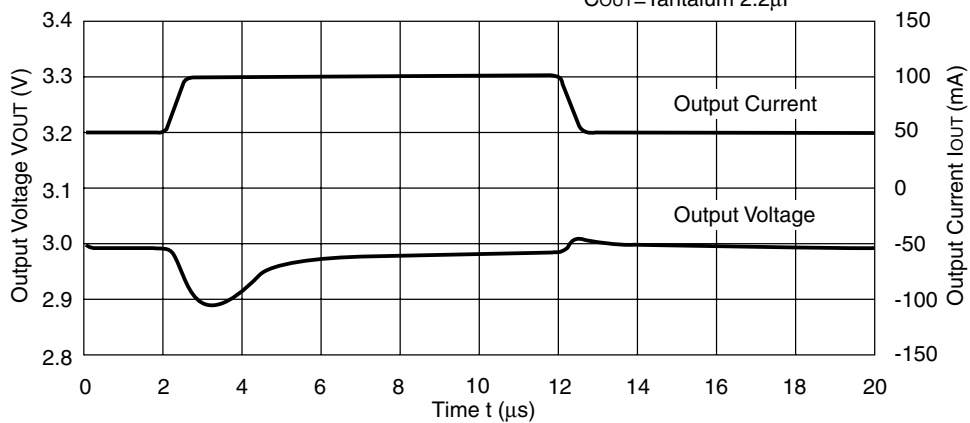

## R1121N301B


$V_{IN}=4V$   
 $C_{IN}=\text{Tantalum } 1\mu F$   
 $C_{OUT}=\text{Tantalum } 6.8\mu F$

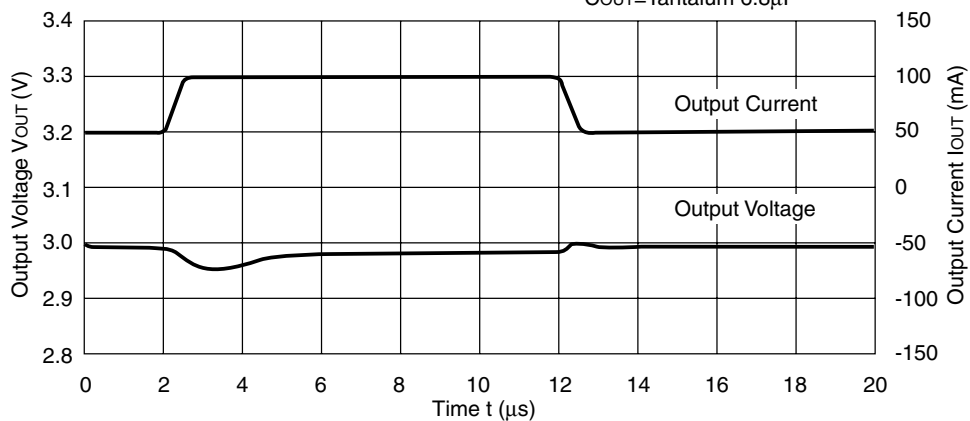

## TECHNICAL NOTES

When using these ICs, be sure to consider the following points:

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, be sure to use a capacitor  $C_{OUT}$  with good frequency characteristics and ESR (Equivalent Series Resistance) in the range described as follows:

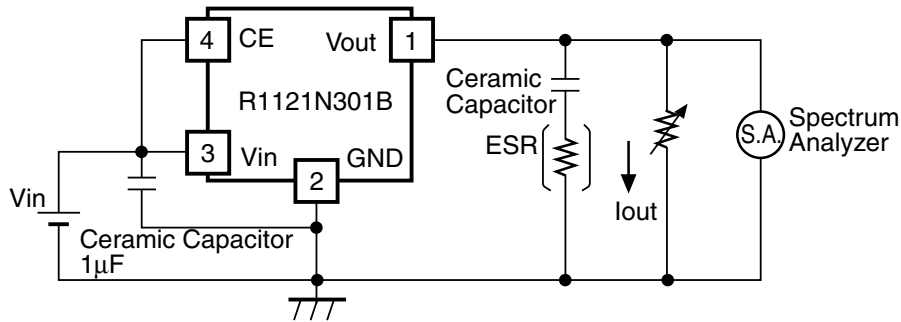



**Measuring Circuit for white noise; R1121N301B**

The relationship between  $I_{OUT}$  (output current) and ESR of output capacitor is shown in the graphs below. The conditions when the white noise level is under 40mV (Avg.) are indicated by the hatched area in the graph.

(note: When the additional ceramic capacitors are connected to the output pin with output capacitor for phase compensation, the operation might be unstable. Because of this, test these ICs with as the same external components as the ones to be used on the PCB.)


<Measurement conditions>

- (1)  $V_{IN}=4V$
- (2) Frequency Band: 10Hz to 1MHz
- (3) Temperature: 25°C

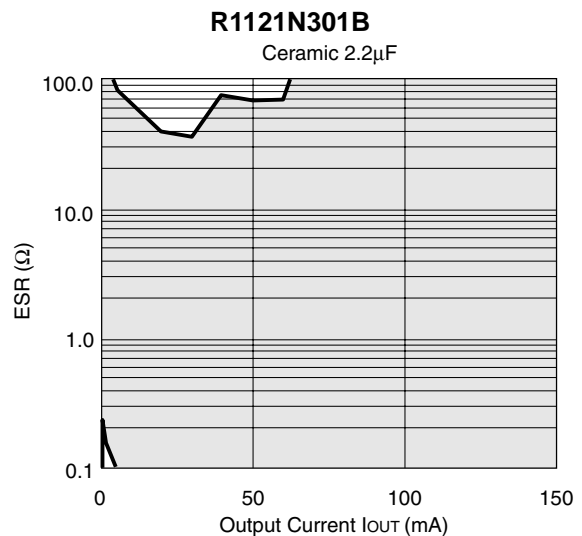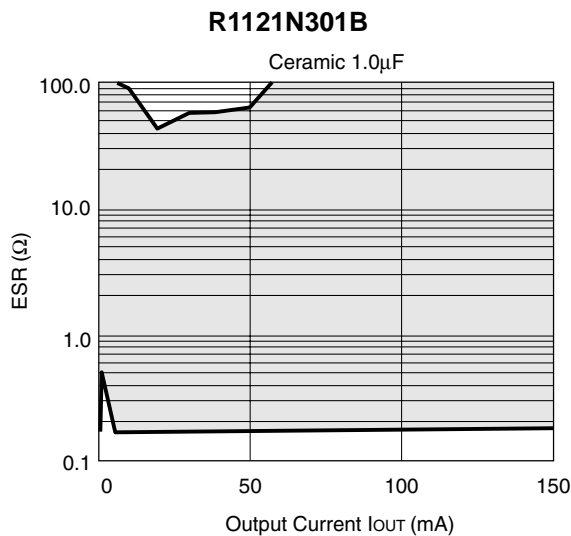

- Make  $V_{DD}$  and GND lines sufficient. If their impedance is high, noise pick up or incorrect operation may result.
- Connect the capacitor with a capacitance of  $1\mu\text{F}$  or more between  $V_{DD}$  and GND as close as possible.
- Set external components, especially the output capacitor, as close as possible to the ICs and make wiring as short as possible.

## TYPICAL APPLICATION

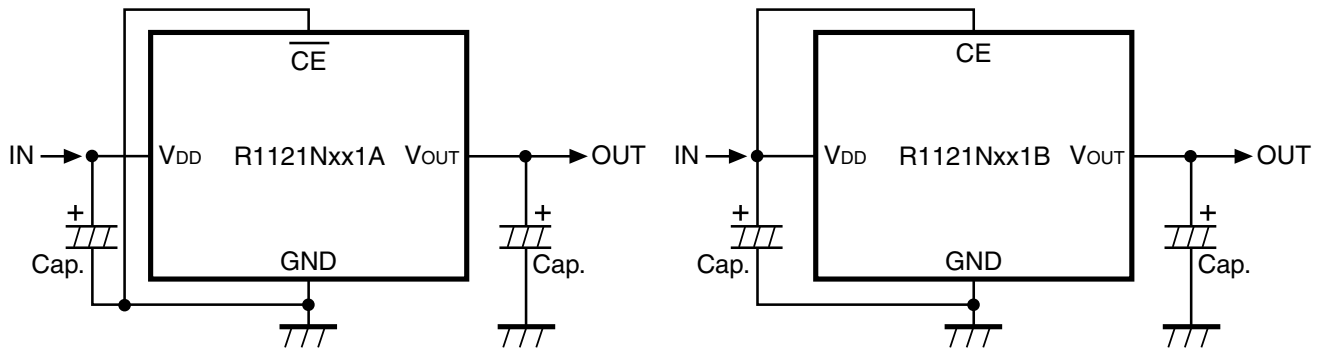



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, firecontainment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.

## RICOH COMPANY., LTD. Electronic Devices Company



■ Ricoh presented with the Japan Management Quality Award for 1999.  
Ricoh continually strives to promote customer satisfaction, and shares the achievements of its management quality improvement program with people and society.



■ Ricoh awarded ISO 14001 certification.  
The Ricoh Group was awarded ISO 14001 certification, which is an international standard for environmental management systems, at both its domestic and overseas production facilities. Our current aim is to obtain ISO 14001 certification for all of our business offices.

<http://www.ricoh.com/LSI/>

### RICOH COMPANY, LTD. Electronic Devices Company

● Higashi-Shinagawa Office (International Sales)  
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan  
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

### RICOH EUROPE (NETHERLANDS) B.V.

● Semiconductor Support Centre  
Prof. W.H.Keesomlaan 1, 1183 DL Amstelveen, The Netherlands  
P.O.Box 114, 1180 AC Amstelveen  
Phone: +31-20-5474-309 Fax: +31-20-5474-791

### RICOH ELECTRONIC DEVICES KOREA Co., Ltd.

11 floor, Haesung 1 building, 942, Daechidong, Gangnamgu, Seoul, Korea  
Phone: +82-2-2135-5700 Fax: +82-2-2135-5705

### RICOH ELECTRONIC DEVICES SHANGHAI Co., Ltd.

Room403, No.2 Building, 690#Bi Bo Road, Pu Dong New district, Shanghai 201203,  
People's Republic of China  
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

### RICOH COMPANY, LTD. Electronic Devices Company

● Taipei office  
Room109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)  
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623



Ricoh completed the organization of the Lead-free production for all of our products. After Apr. 1, 2006, we will ship out the lead free products only. Thus, all products that will be shipped from now on comply with RoHS Directive.